



WARNING

- The installation must only be performed by a licensed electrician.
- To prevent death, injury or damage to property this product must be installed in accordance to National Electric Code in the US or Canadian Electrical Code (CSA22.1) in Canada.
- Disconnect power before installing the product or servicing it.
- Wait until the lamp(s) have cooled down before installing or servicing the fixture.
- Make sure the lamp fixture is grounded.
- Modification to the LTrim fixture voids its warranty and UL Listing.




DESCRIPTION

Heavy gauge aluminum reflector in anodized clear finish
Premium heatsink
0-10V dimming
TBD warranty
TBD UL/ETL/Energy Star
TBD CCT Options
Do not install insulation within 76mm (3 inch) of any part of the luminaire

Technical Parameters	6"	8"	10"
Size	7.48" Diameter x 3.46" High	9.05" Diameter x 3.58" High	11.02" Diameter x 4.57" High
System Power	18 Watts	28 Watts	37 Watts
Lumens	1700 Lm	3038 Lm	3950 Lm
Efficacy	95	110	106
Cutout Size	TBD	TBD	TBD



INSTALLATION WITH SPRING

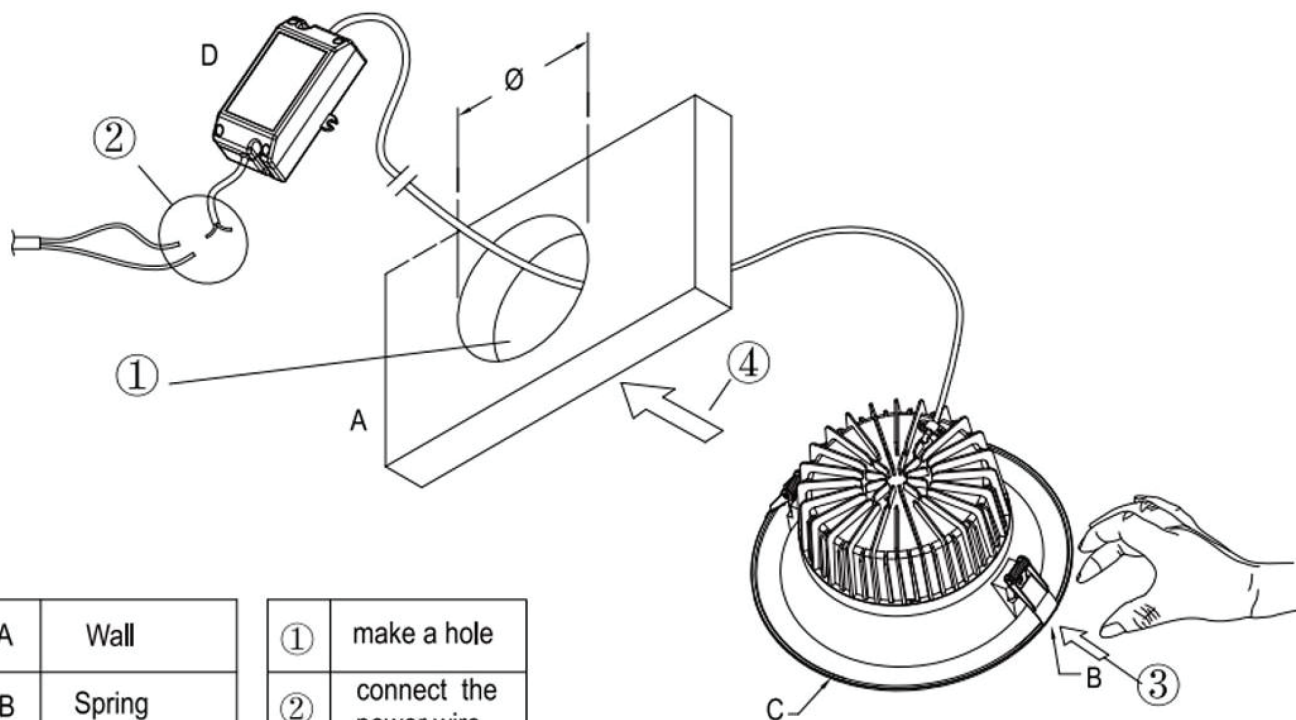

A	Wall	①	make a hole
B	Spring	②	connect the power wire
C	LED lamp	③	push spring
D	Driver	④	put the lamp into the hole

OPTIONAL: 0-10 VOLT DIMMING LIGHTING CONTROLLER

At output side of LED driver, make appropriate connections using twist-on wire connectors. Follow the lighting controller installation instructions.

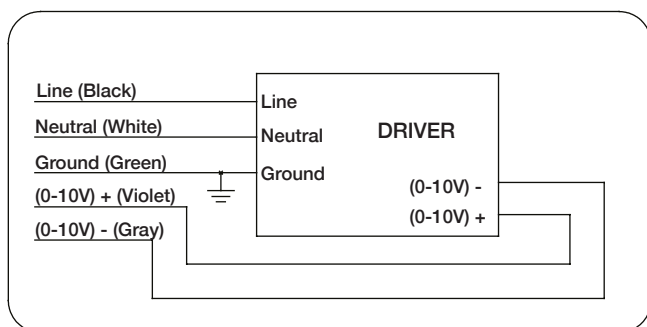

Specifications and dimensions subject to change without notice.

Printed in China
UPDATED 08.06.2018
44-000011