






## **WARNING**

- The installation must only be performed by a licensed electrician.
- To prevent death, injury or damage to property this product must be installed in accordance to National Electric Code (NFPA70) in the US or Canadian Electrical Code (CSA22.1) in Canada.
- Disconnect power before installing the product or servicing it.
- Wait until the lamp(s) have cooled down before installing or servicing the fixture.
- Make sure that the lamp fixture is grounded.
- Modification to the QPXL fixture voids its warranty and UL Listing.


# **INSTALLATION INSTRUCTIONS - SURFACE MOUNT**

- 1. Verify power is disabled.
- 2. Remove fixture from carton.
- 3. Loosen the two captive screws opposite the hinge side.
- 4. Separate the power supply half from the LED half.
- 5. Mount the power supply half to the surface.
- 6. Connect the power supply wires to the line voltage, black (line), white (neutral), and green (ground).
- 7. Hang the LED half from the power supply half and connect the red and black wires.
- 8. Close cover, use caution not to pinch wires and secure the two screws opposite the hinge.
- 9. Energize fixture.


### Mount the power supply half to the surface




#### Connect the wires are shown



## Slide the LED half onto the hinges of the power supply half



#### Connect the low voltage, black and red wires



Specifications and dimensions subject to change without notice








# **PLEASE READ**

WARNING: Read and follow installation instructions for proper installation. Improper installation will void warranty and can cause damage to the fixture.

# **INSTALLATION INSTRUCTIONS - CONDUIT MOUNT**

- 1. Verify power is disabled.
- 2. Remove fixture from carton.
- 3. Screw the QPXL onto the conduit.
- 4. Loosen the two captive screws opposite the hinge side and open the housing
- 5. Connect the power supply wires to the line voltage, black (line), white (neutral), and green (ground).
- 6. Connect the red and black low voltage wires.
- 7. Close cover, use caution not to pinch wires and secure the two screws opposite the hinge.
- 8. Energize fixture.

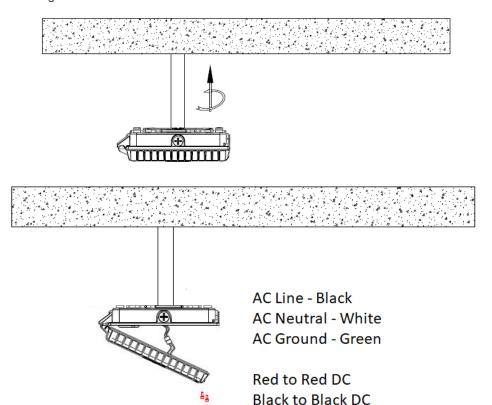

US LED | 6807 PORTWEST DR | HOUSTON, TX 77024 | T 866 972 9191 | F 713 972 9393 | info@usled.com | www.usled.com